


Dryback-Vinyl - 0.7 mm wear layer

Size: 187 x 1175 mm


Per Unit: 3.955 m²

Per Pallet: 237,3 m²


Utility Classes

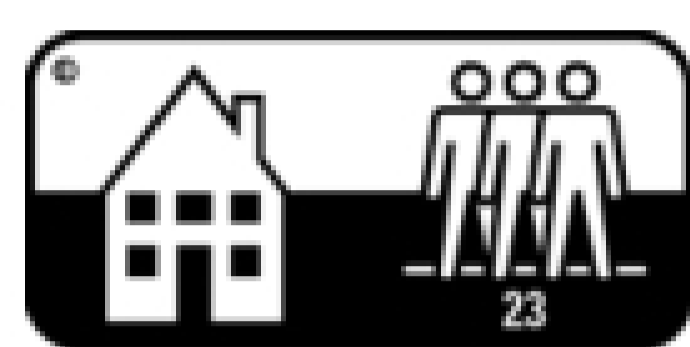

Domestic - heavy use

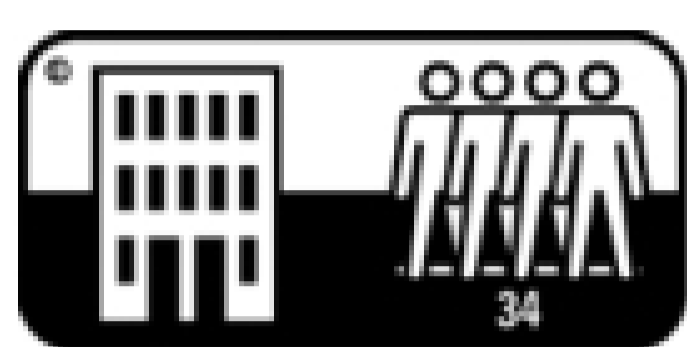

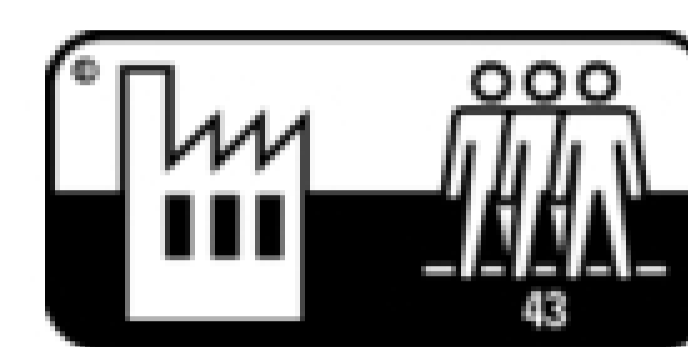

Commercial - heavy use



Industrial - heavy use



Feature	Standard	Parameter	Adhesives
Total thickness	EN 428 ISO 24346	2.5 mm	 AUS GUTEM GRUND AF 2224 AF 155 AF 180 A2-Zahnleiste  Anspruch verbindet D 3307 D 3320 D 3330 D 3125
Wear layer	EN 429 ISO 24340	0.7 mm	
Total weight	EN 430 ISO 23997	4.388 g/m ²	
Slip resistance	EN 13893	R10	
Fire behaviour	EN 13501-1	Bfl s1 on concrete & wood	
Chair caster	EN 425	No damages	
Furniture foot	EN 424	No damages	
Sound improvement	EN 717-2	ΔLw = 2db	
Underfloor heating	/	suitable - for 27°C	
Lightfastness	ISO 105-B02	≥6	
Dimensional stability	EN 434 ISO 23999	≤ 0.10 %	
Antistatic	EN 1815	≤ 2 kV on concrete	
Residual Indentation	EN 433	≤ 0.05 mm	
Chemical resistance	EN 423	High resistance	
Electrical discharge	EN 1081	> 10Ω	

Decotec GmbH
 Rosemeyerstraße 14
 44139 Dortmund

 +49 (0)231/912 900 870
 kontakt@decotec-germany.de
 www.decotec-germany.de