


Rigid Vinyl - 0.55 mm Wear Layer

with integrated 1.0 mm IXPE impact sound insulation

Format: 187 x 1175 mm

Carton: 3.955 m²

Pallet: 60 cartons - 237.3 m

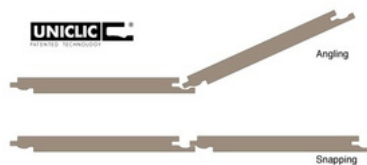

Usage classes



Residential - heavy use



Commercial - very heavy use



Industrial - heavy use

Property

Standard

Value



Total Thickness

EN 428
ISO 24346

4,5 mm



Wear Layer Thickness

EN 429
ISO 24340

0,55 mm



Total Weight

EN 430
ISO 23997

8.200 g / m²



Slip Resistance

EN 13893

R10



Reaction to Fire

EN 13501-1

Bfl s1 on concrete and wood



Chair Castor Suitability

EN 425

No damage



Furniture Leg Test

EN 424

No damage



Impact Sound Reduction

EN 717-2

Δlw = 18db



Underfloor Heating

/

Suitable - bis 27°C



Light Fastness

ISO 105-B02

≤ 6



Dimensional Stability

EN 434
ISO 23999

≤ 0,10 %



Antistatic Properties

EN 1815

≤ 2 kV on concrete



Residual Indentation

EN 433

≤ 0,10 mm



Chemical Resistance

EN 423

High resistanc



Electrical Conductivity

EN 1081

≤ 10Ω

Decotec GmbH

Rosemeyerstraße 14
44139 Dortmund
Germany

+49 (0)231/912 900-870

kontakt@decotec-germany.de